



Peoples fireplace.

ABOUT US.

For more than 27 years A.Caminetti, formed by a small Italian family business, has developed into a large company that meets all the requirements of customers.


A.caminetti adapts to all standards, simplicity in reliability and refinement in design.

Our company has been committed to generating heat conveniently, economically, with environmental responsibility and in accordance with trade requirements. With a wide variety of outstanding product developments which provides heating problem - solutions, A.Caminetti is being placed with the highest quality products world wide!

A.Caminetti's orientation is decisively international - as it exports in Europe, Asia and Africa region.

With a dedicated commitment and with a passionate work for fire, we achieved to be one of the leaders in the International Heating market. A.caminetti is not only a trade mark, but a solution for all the desires and customers fantasy, for a suitable and comfortable accommodation.



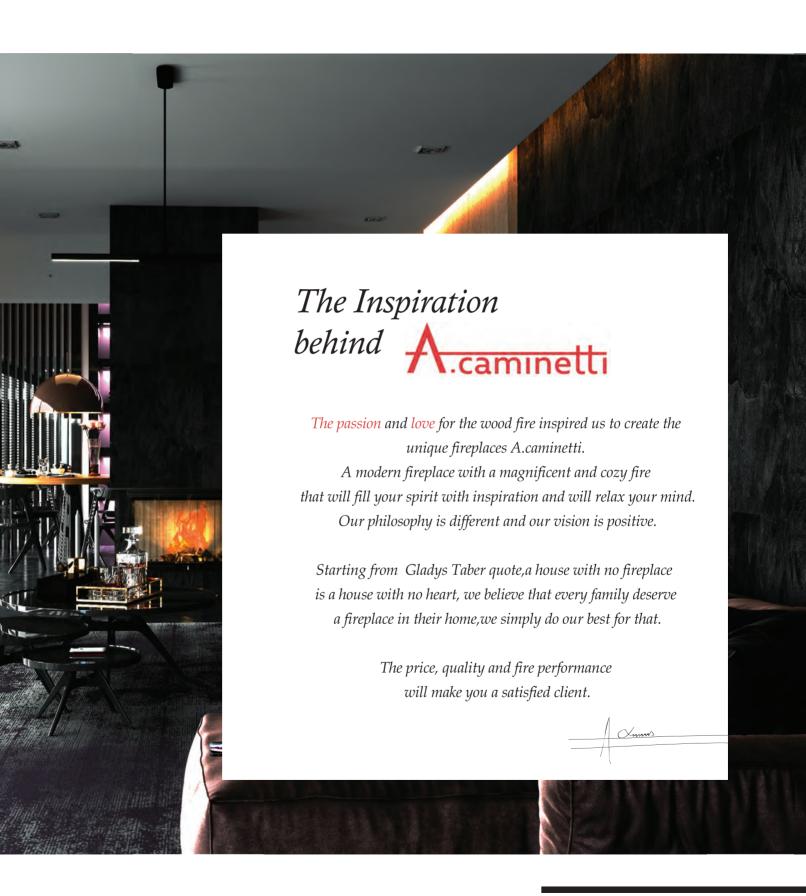

High Efficency > 80%

Eco Friendly Product

Lovely Performance

Premium Design

Easy installation

Low emmission

Safety / Easy operation











OUR COMPANY.

27 YEARS OF EXPERIENCE!

Production facilities located in Albania.
Warehouse in Munich/ Germany for express delivery in EU-COUNTRIES.
Production area 7000 sqm.
Annual production capacity,
8000 - Lift door fireplaces/wood burning.

ADVANTAGES.

- ✓ A.caminetti products *are made of high quality materials* that provide maximal functional efficency.
- ✓ Our products will not leave indifferent even the most demanding buyer.
- ✓ **High power** will provide heating even in a large room.
- ✓ Fuel for briquettes and fire wood.
- ✓ The fireplaces are made of steel, which provides you with *reliable use for decades*.
- ✓ Each model can be orderd under *individual sizes*.
- ✓ **Products are certified** with- CE/ EN 13229/ Blm SchV II/ Flamme VERTE/ ECODESIGN.
- ✓ **Guarantee in 5 years** will allow you to be calm and confident in the reliability of the company.







MANUFACTURING PROCESS.

Insert coat made of steel, with a thickness of 3 mm in accordance with EN 13229 Insert components manufactured using modern cnc machines (2D Laser and press brakes) Insert welded with MAG, guaranteed high quality.

Steel door made of a special profile, guaranteeing rigidity and high-temperature resistance. Heat resistant ceramic glass with working temperatures of up to 800°C.

Each material in our fireplaces are strictly choosen, we are proud for our partners, Partner companies: Senotherm/ Schock metall/ Schott ROBAX/ Culimeta/ Skamol

Culimeta is global leading industry supplier in the field of gaskets for fireplaces, as well as door and window seals for industrial-, stove- and heating boiler constructions.

Skamol is technical insulation systems for a wide range of applications within building and industry. With our systems, we aim at adding significant value to our partners, customers and to the environment. By implementing our unique systems, benefits such as energy savings, enhanced performance, improved working and living environment and even reduced CO2 emissions can be achieved

SCHOTT ROBAX® glass-ceramic is "Engineered in Germany" and manufactured to demanding standards for quality and environmental management

Schock Metall stands for precision in ball bearing slides and special profiles. For more than 40 years, they have been using the high-precision Schock roll forming technology to manufacture telescopic slides and other sliding systems.

The senotherm® CLASSIC product line comprises a comprehensive range of conventional coating solutions. With a guaranteed "true" temperature resistance of up to 600 ° C





A WIDE RANGE
OF SHAPES,
ACCORDING
TO YOUR
DESIRES
AND
PREFERENCES!

- ► FLAT GLASS
- ► CORNER GLASS
- ▶ 3 SIDE GLASS (3D)
- ▶ 4 SIDE GLASS (4D)



WOOD BURNING ADVANTAGES.

Compared with using fossil fuels for heat (natural gas, propane, coal, etc.) wood is much more eco-friendly. It's considered "carbon-neutral," which means when it burns, it doesn't add additional carbon dioxide to the environment.


This is because in its natural state as a tree, wood absorbs carbon dioxide that's in the atmosphere.

During combustion, a balance is

maintained.

If you live in a region that has occasional power outages throughout the winter, you know how valuable a heat source that is 100% self-contained can be.

With a dependable wood burning fireplace, you'll stay warm around the clock, regardless of your home's supply of gas or electricity.

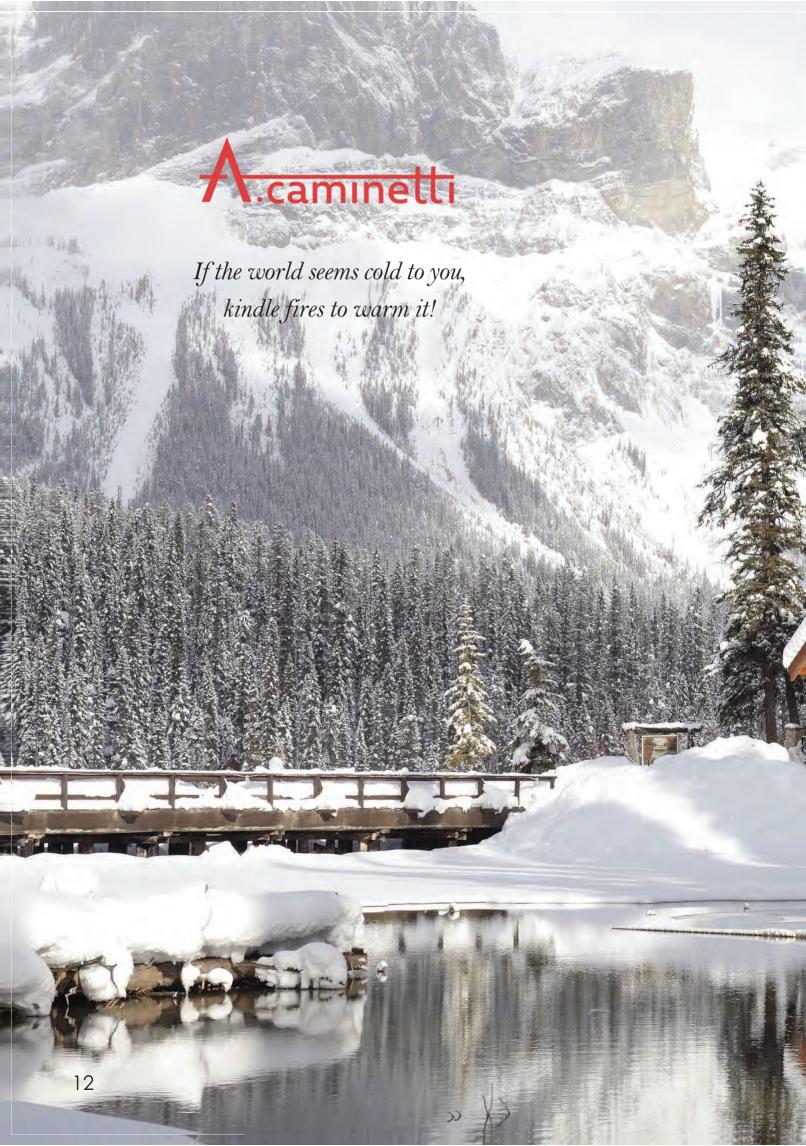











Crystal 80 Max







| MODEL | CRYSTAL 80 MAX |
|----------------------|----------------|
| | |
| POWER | 7-13 KW |
| EFFICENCY | 85% |
| CONSUME | 2,2 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 249 KG |
| FLUE GAS TEMPERATURE | 220° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.044 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|---------|
| DEPTH | 722 MM |
| WIDTH | 947 MM |











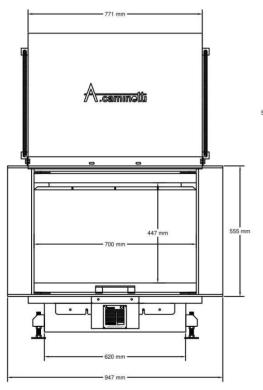

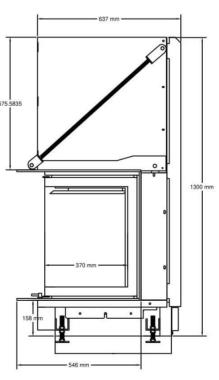

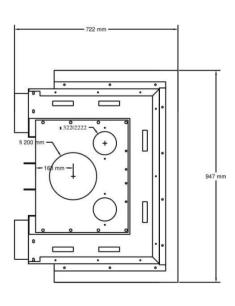

Crystal 90 Max

A⁺





TECHNICAL SPECIFICATION OVERALL DIMENSION

| MODEL | CRYSTAL 90 MAX |
|----------------------|----------------|
| | |
| POWER | 10-17 KW |
| EFFICENCY | 87% |
| CONSUME | 4,3 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 298 KG |
| FLUE GAS TEMPERATURE | 213° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.031 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|---------|
| DEPTH | 722 MM |
| WIDTH | 1097 MM |











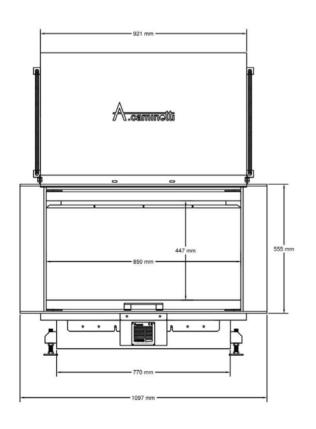

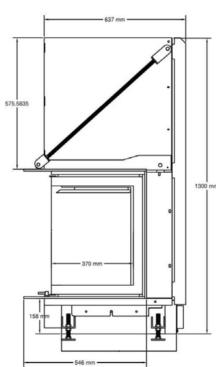

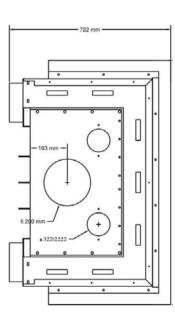

Crystal 110 Max







| MODEL | CRYSTAL 110 MAX |
|----------------------|-----------------|
| | |
| POWER | 13-18 KW |
| EFFICENCY | 88% |
| CONSUME | 4,8 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 347 KG |
| FLUE GAS TEMPERATURE | 211°C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | Ø 200 MM |
| СО | 0.028 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|---------|
| DEPTH | 722 MM |
| WIDTH | 1274 MM |











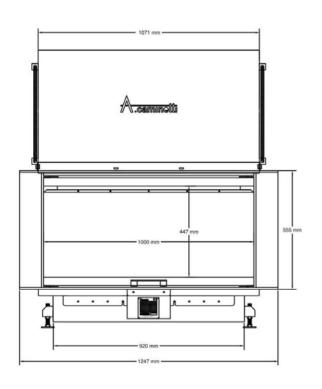

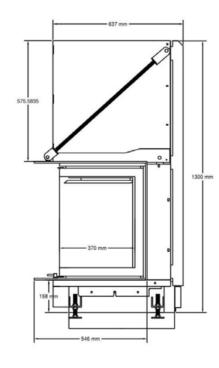

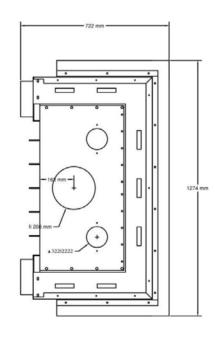

Crystal 3D 50x60

A⁺





| MODEL | CRYSTAL 3D 50x60 |
|----------------------|------------------|
| | |
| POWER | 7-14 KW |
| EFFICENCY | 85% |
| CONSUME | 2,7 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 280 KG |
| FLUE GAS TEMPERATURE | 218° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| со | 0.041 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|---------|
| DEPTH | 738 MM |
| WIDTH | 950 MM |











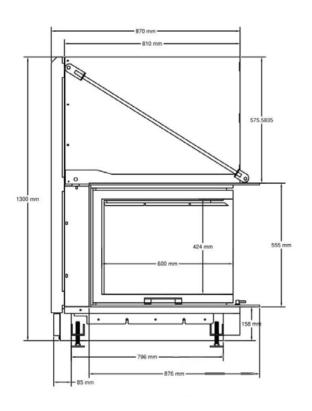

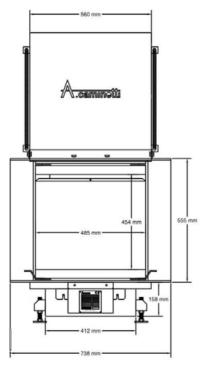

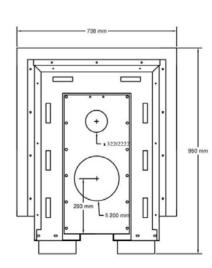

Crystal 3D 50x70







| MODEL | CRYSTAL 3D 50x70 |
|----------------------|------------------|
| | |
| POWER | 7-14 KW |
| EFFICENCY | 85% |
| CONSUME | 2,7 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 306 KG |
| FLUE GAS TEMPERATURE | 218° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.041 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|---------|
| DEPTH | 738 MM |
| WIDTH | 1050 MM |










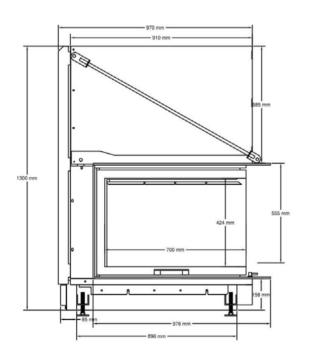



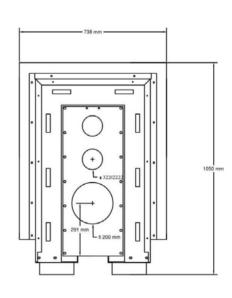

Crystal 3D Max







| MODEL | CRYSTAL 3D MAX |
|----------------------|----------------|
| | |
| POWER | 13 - 17 KW |
| EFFICENCY | 87% |
| CONSUME | 4,3 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 331 KG |
| FLUE GAS TEMPERATURE | 220° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.031 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|-----------|
| DEPTH | 738 MM |
| WIDTH | 1 1 50 MM |









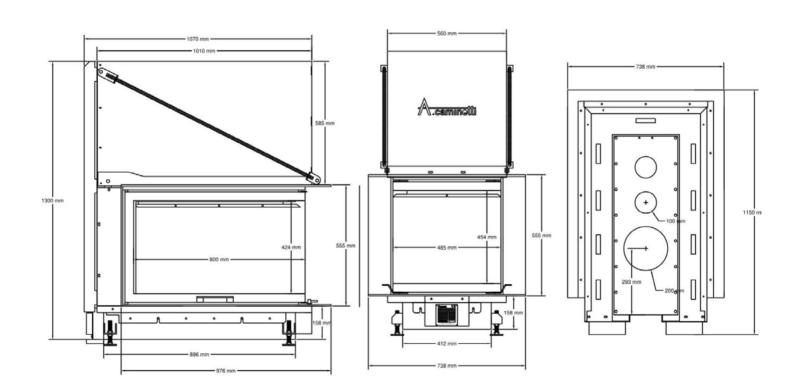





Quattro 80 R

A⁺





| MODEL | QUATTRO 80 R |
|----------------------|----------------|
| | |
| POWER | 7-13 KW |
| EFFICENCY | 89% |
| CONSUME | 3,2 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 249 KG |
| FLUE GAS TEMPERATURE | 172° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | Ø 200 MM |
| СО | 0.036 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|---------|
| DEPTH | 722 MM |
| WIDTH | 955 MM |











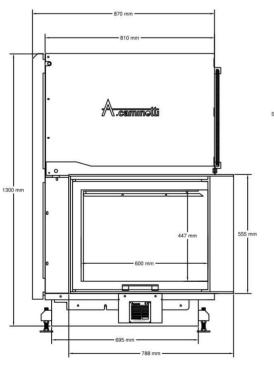

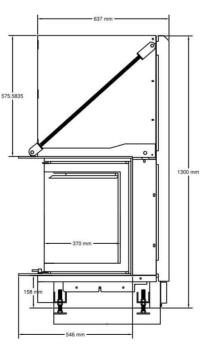

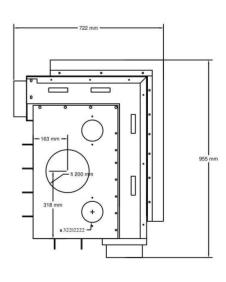

Quattro 80 L

 A^{+}





| MODEL | QUATTRO 80 L |
|----------------------|----------------|
| | |
| POWER | 7-13 KW |
| EFFICENCY | 89% |
| CONSUME | 3,2 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 249 KG |
| FLUE GAS TEMPERATURE | 172° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.036 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|---------|
| DEPTH | 722 MM |
| WIDTH | 955 MM |









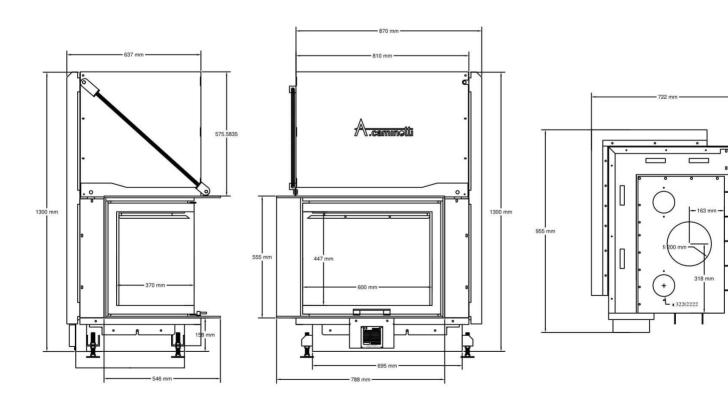

Quattro 90 L





| MODEL | QUATTRO 90 L |
|----------------------|----------------|
| | |
| POWER | 8-14 KW |
| EFFICENCY | 87% |
| CONSUME | 3,7 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 284 KG |
| FLUE GAS TEMPERATURE | 206° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.033 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|---------|
| DEPTH | 722 MM |
| WIDTH | 1105 MM |









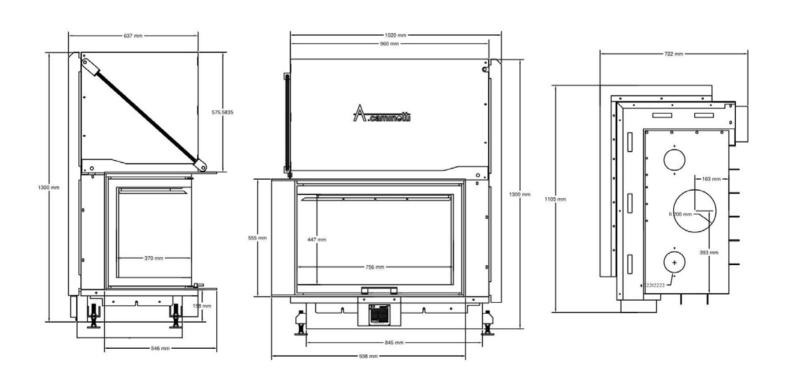

Quattro 90 R





| MODEL | QUATTRO 90 R |
|----------------------|----------------|
| | |
| POWER | 8-14 KW |
| EFFICENCY | 87% |
| CONSUME | 3,7 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 284 KG |
| FLUE GAS TEMPERATURE | 206° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.033 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|------------|
| DEPTH | 722 MM |
| WIDTH | 1 1 0 5 MM |









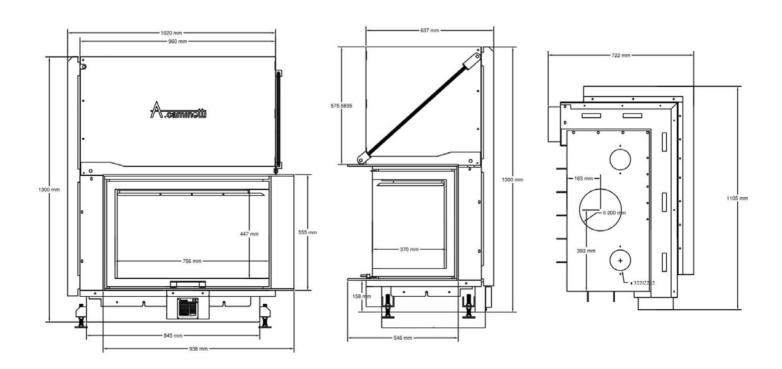

Quattro 100 L





| MODEL | QUATTRO 100 L |
|----------------------|----------------|
| | |
| POWER | 13 - 17 KW |
| EFFICENCY | 85% |
| CONSUME | 4,3 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 354 KG |
| FLUE GAS TEMPERATURE | 198° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.045 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|---------|
| DEPTH | 722 MM |
| WIDTH | 1255 MM |









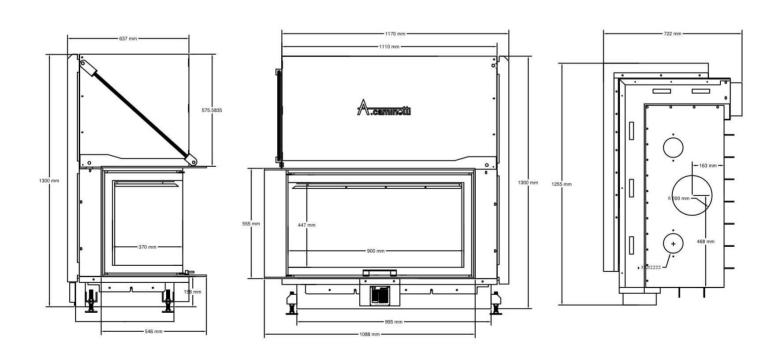

Quattro 100 R

 A^{+}





| MODEL | QUATTRO 100 R |
|----------------------|----------------|
| | |
| POWER | 13 - 17 KW |
| EFFICENCY | 85% |
| CONSUME | 4,3 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 354 KG |
| FLUE GAS TEMPERATURE | 198° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.045 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1300 MM |
|--------|---------|
| DEPTH | 722 MM |
| WIDTH | 1255 MM |











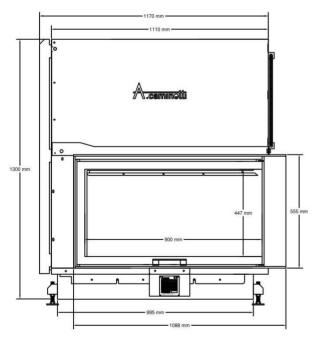

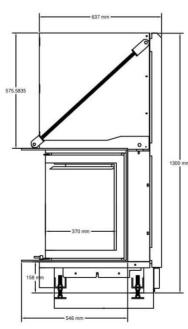

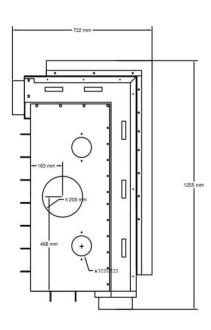





Flat 75 x 50

 \mathbf{A}^{+}





| MODEL | FLAT 75 x 50 |
|----------------------|----------------|
| | |
| POWER | 7 -14 KW |
| EFFICENCY | 87% |
| CONSUME | 3,5 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 282 KG |
| FLUE GAS TEMPERATURE | 186° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.076 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1490 MM |
|--------|---------|
| DEPTH | 540 MM |
| WIDTH | 1125 MM |











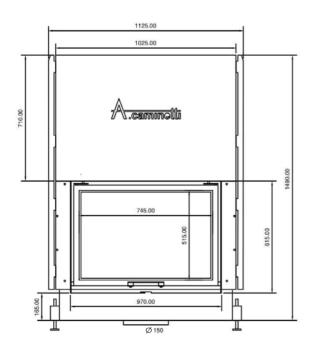

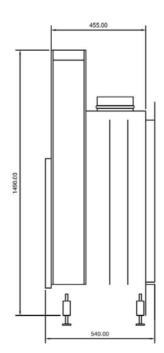



Flat 75 x 60





| MODEL | FLAT 75 x 60 |
|----------------------|----------------|
| | |
| POWER | 9 - 15 KW |
| EFFICENCY | 86% |
| CONSUME | 3,8 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 300 KG |
| FLUE GAS TEMPERATURE | 191°C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.077 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1590 MM |
|--------|---------|
| DEPTH | 540 MM |
| WIDTH | 1125 MM |











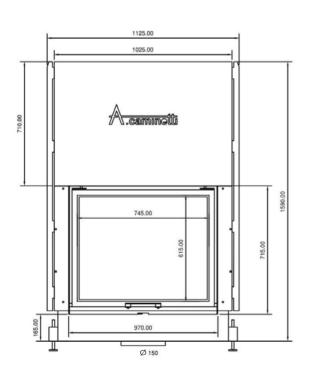

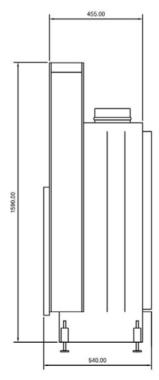



Flat 90x 50





| MODEL | FLAT 90 x 50 |
|----------------------|----------------|
| | |
| POWER | 13-18 KW |
| EFFICENCY | 83% |
| CONSUME | 4,6 KG/H |
| HOT AIR OUTLET | 4 X Ø 100 MM |
| WEIGHT | 315 KG |
| FLUE GAS TEMPERATURE | 207° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.081 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1485 MM |
|--------|---------|
| DEPTH | 540 MM |
| WIDTH | 1275 MM |











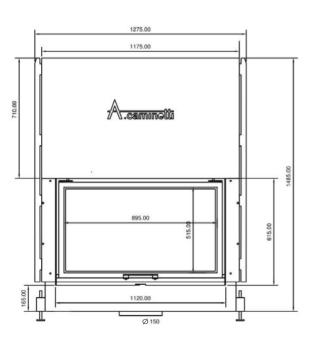

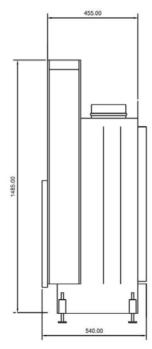

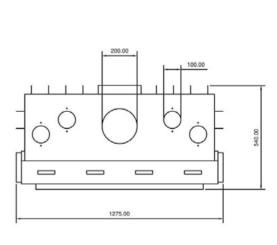

Flat 90 x 60





| MODEL | FLAT 90 x 60 |
|----------------------|----------------|
| | |
| POWER | 13 - 19 KW |
| EFFICENCY | 83% |
| CONSUME | 4,9 KG/H |
| HOT AIR OUTLET | 4 X Ø 100 MM |
| WEIGHT | 333 KG |
| FLUE GAS TEMPERATURE | 212° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.082 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1585 MM |
|--------|---------|
| DEPTH | 540 MM |
| WIDTH | 1275 MM |











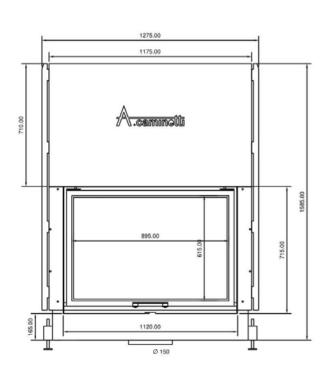

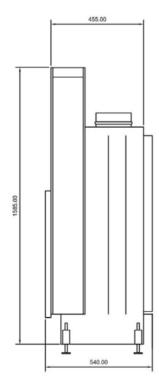

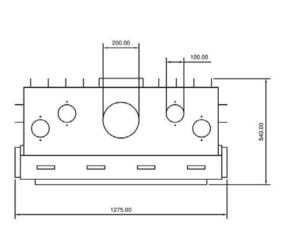

Flat 90 x 70





| MODEL | FLAT 90 x 70 |
|----------------------|----------------|
| | |
| POWER | 13-19 KW |
| EFFICENCY | 83% |
| CONSUME | 4,9 KG/H |
| HOT AIR OUTLET | 4 X Ø 100 MM |
| WEIGHT | 374 KG |
| FLUE GAS TEMPERATURE | 212° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.082 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1690 MM |
|--------|---------|
| DEPTH | 540 MM |
| WIDTH | 1275 MM |











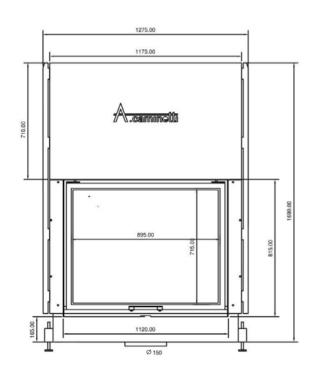

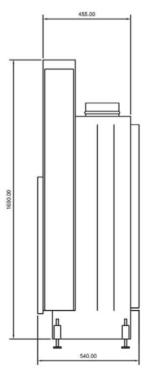

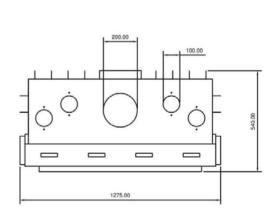

Flat 120 x 50







| MODEL | FLAT 120 x 50 |
|----------------------|----------------|
| | |
| POWER | 15-21 KW |
| EFFICENCY | 81% |
| CONSUME | 5,4 KG/H |
| HOT AIR OUTLET | 4 X Ø 100 MM |
| WEIGHT | 400 KG |
| FLUE GAS TEMPERATURE | 222° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 250 MM |
| со | 0.084 % |
| WARRANTY | 5 YEARS |


| HEIGHT | 1490 MM |
|--------|---------|
| DEPTH | 540 MM |
| WIDTH | 1575 MM |











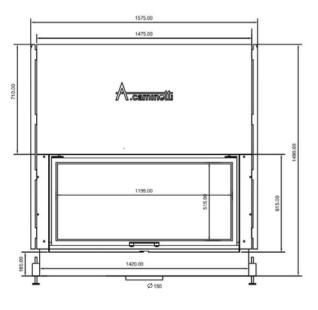

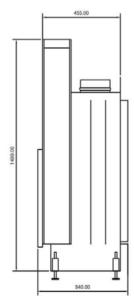

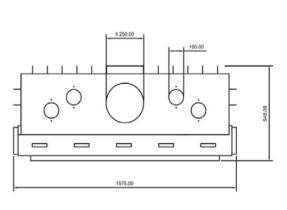

Flat W 75 x 60







| MODEL | FLAT W 75 x 60 |
|----------------------|----------------|
| | |
| POWER | 9 - 15 KW |
| EFFICENCY | 78% |
| CONSUME | 3,8 KG/H |
| HOT AIR OUTLET | 4 X Ø 100 MM |
| WEIGHT | 324 KG |
| FLUE GAS TEMPERATURE | 250° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.15% |
| WARRANTY | 5 YEARS |


| HEIGHT | 1590 MM |
|--------|---------|
| DEPTH | 655 MM |
| WIDTH | 1125 MM |





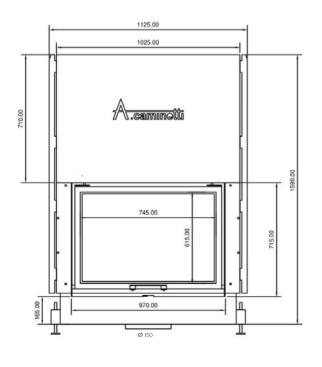

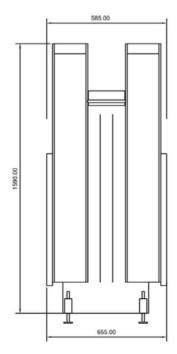

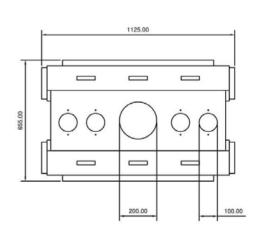

Flat W 90 x 60







| MODEL | FLAT W 90 x 60 |
|----------------------|----------------|
| | |
| POWER | 13-19 KW |
| EFFICENCY | 75% |
| CONSUME | 4,9 KG/H |
| HOT AIR OUTLET | 2 X Ø 100 MM |
| WEIGHT | 383 KG |
| FLUE GAS TEMPERATURE | 258° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.15% |
| WARRANTY | 5 YEARS |


| HEIGHT | 1590 MM |
|--------|---------|
| DEPTH | 655 MM |
| WIDTH | 1275 MM |





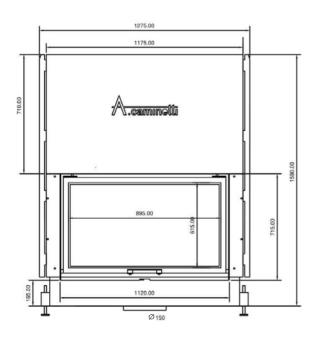

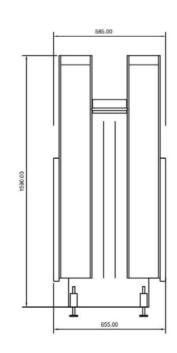



Flat W 120 x 60







| MODEL | FLAT W 120 x 60 |
|----------------------|-----------------|
| | |
| POWER | 15-21 KW |
| EFFICENCY | 75% |
| CONSUME | 5,4 KG/H |
| HOT AIR OUTLET | 4 X Ø 100 MM |
| WEIGHT | 420 KG |
| FLUE GAS TEMPERATURE | 265° C |
| FUEL | WOOD/BRIQUETTE |
| PIPE DIAMETER | ø 200 MM |
| СО | 0.15% |
| WARRANTY | 5 YEARS |


| HEIGHT | 1590 MM |
|--------|---------|
| DEPTH | 655 MM |
| WIDTH | 1575 MM |





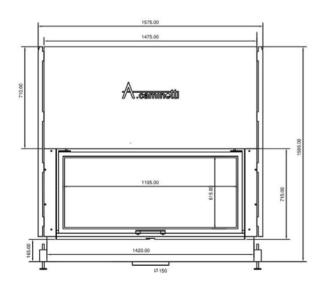

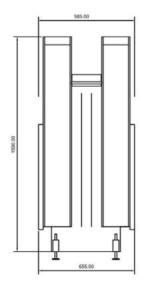

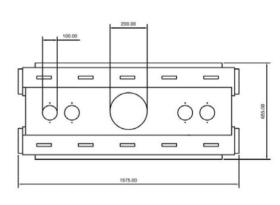

9 LOCATION



A.caminetti Factory: National road, km 2 Korçë-Ersekë, Albania.



A.caminetti GmbH Lager: Am Industriegleis 6a, 84030 Ergolding, Germany.